Hybrid 3z20 Traveler

November 4, 1999

1 Connectivity

Repairs on shorts:

Fixes for opens:
Bus2 open on chip 2, fixed with wire bond jump from chip 1 to chip 2.

2 Chips

The following chips were assembled on this hybrid (in the order that the chips get read out):
Hybrid 3Z20 has die: 071-033 071-035 071-036

3 Data Analysis Summary

The following summarizes the findings of the Burn-in data analysis program. The first chip in the readout name is numbered 0.

```
% Hybrid 3z20 classification info. Created 18:54:50 10/29/99

Hybrid 3z20 quality: fair
Chip classification: good good fair
Bad channels: none
Bad cells: none
Random bad capacitors (chip-cell-channel): 2-25-41
Channels at pedestal needed for DCMS: 36.2 34.6 34.6
```

4 Comments

Has 4.7μF digital caps.

5 Pedestal

The following plot shows the pedestals vs. channel number with and without charge injection:

Pedestal for each Channel

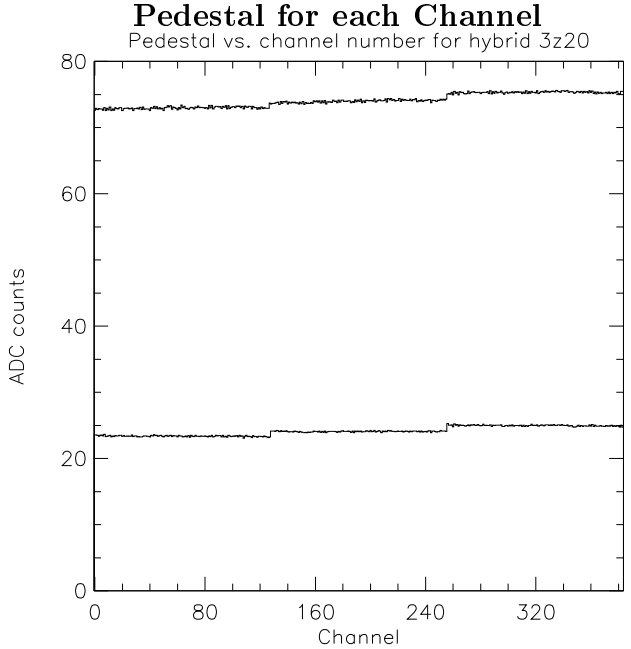

The following plot shows the average pedestal vs. pipeline cell ID with and without charge injection. The x-axis is cell ID offset by 46 for each chip. Thus cell ID 5 for chip 1 is at x=5, chip 2 at x=51, chip 3 at x=97, etc.

Pedestal vs. Pipeline Cell ID

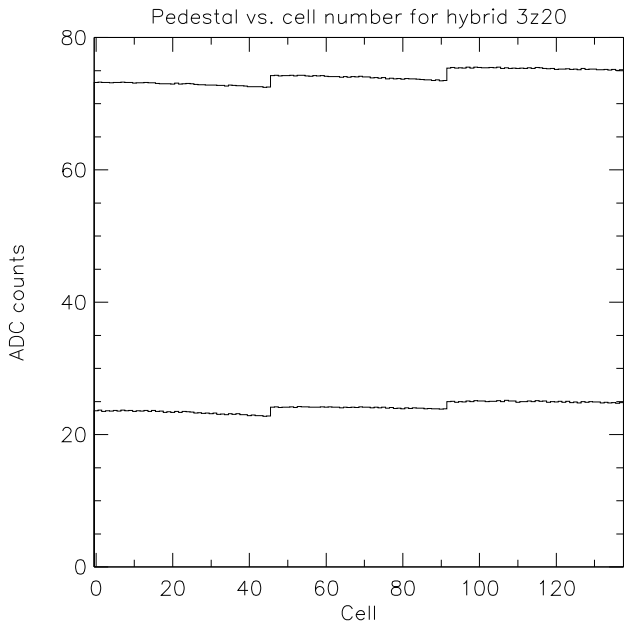

6 Noise

The following plots show the single-cell and multi-cell RMS noise:

RMS Noise

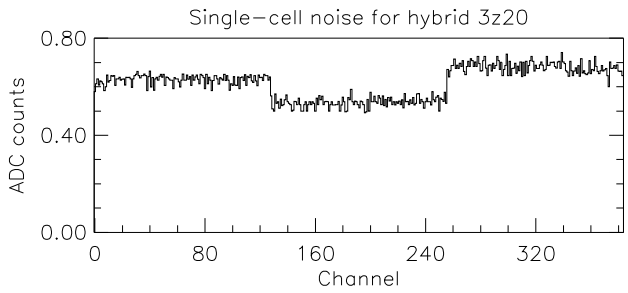

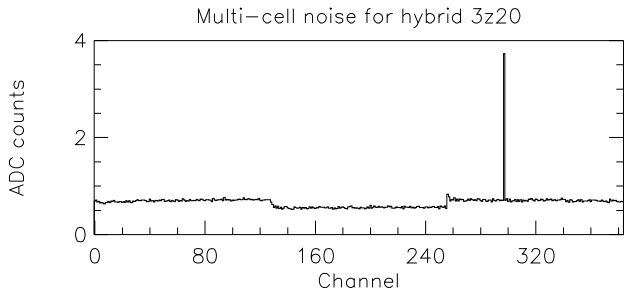

The following are histograms of the pedestal of each pipeline capacitor relative to the chip average (top); and the RMS noise of each capacitor (bottom):

Distribution of Pedestals and Noise

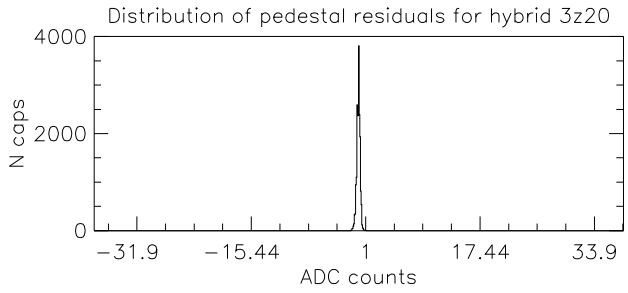

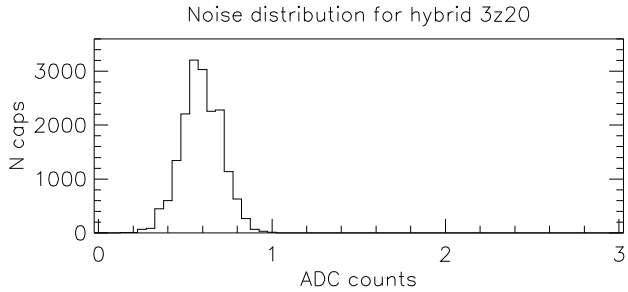

7 Currents

The following plots show the supply currents per chip as a function of measurment number. Currents are measured approximately every 10 minutes:
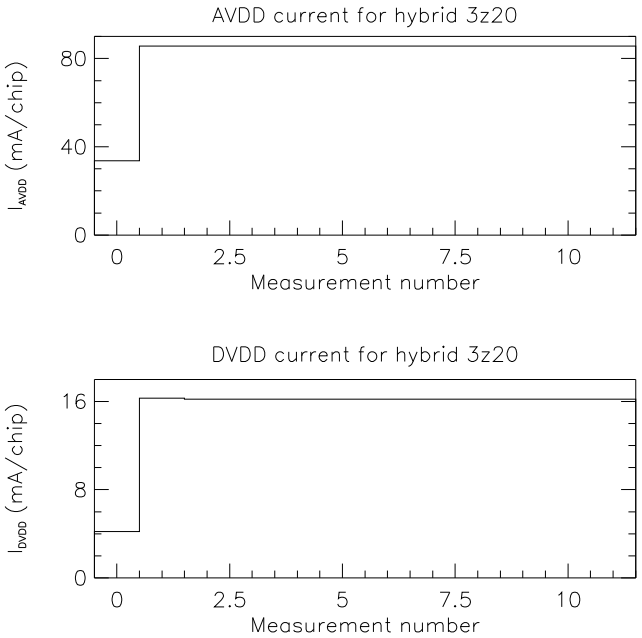
Supply Currents During Burn-in