Hybrid 7z43 Traveler

June 1, 2000

1 Connectivity

Repairs on shorts:
Fixes for opens: HV open between HV-resistors, fixed with jumper.

2 Chips

The following chips were assembled on this hybrid (in the order that the chips get read out):
Hybrid 7Z43 has die: 238-080 238-081 238-085 238-086 238-087 238-088 238-089

3 Data Analysis Summary

The following summarizes the findings of the Burn-in data analysis program. The first chip in the readout name is numbered 0.

```
% Hybrid 7z43 classification info. Created 14:03:34 05/29/00

Hybrid 7z43 quality: fair
Chip classification: fair good fair good good good fair
Bad channels (chip-channel): 0-12 2-112 6-13 6-77
Bad cells: none
Random bad capacitors (chip-cell-channel): 2-8-111
Channels at pedestal needed for DCMS: 29.7 30.7 31.7 32.7 29.6 30.7 30.7
```

4 Comments

Encapsulated. FE DV finger gold bonds. HV tested.

5 Pedestal

The following plot shows the pedestals vs. channel number with and without charge injection:

Pedestal for each Channel

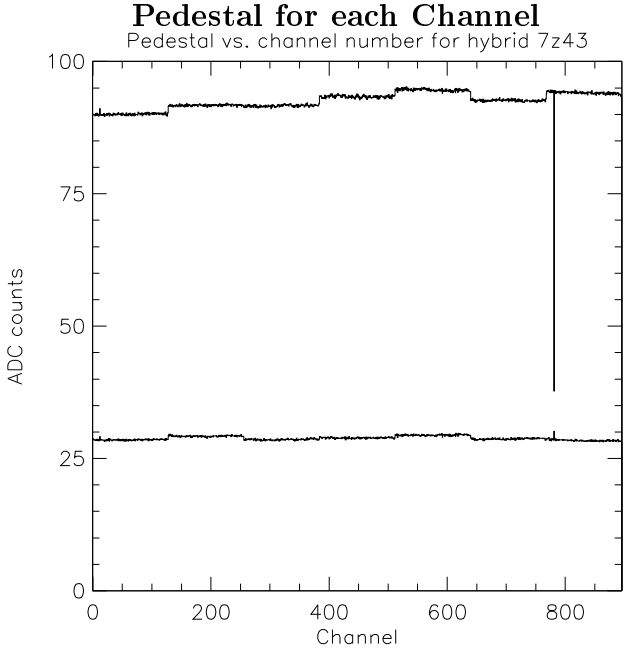

The following plot shows the average pedestal vs. pipeline cell ID with and without charge injection. The x-axis is cell ID offset by 46 for each chip. Thus cell ID 5 for chip 1 is at x=5, chip 2 at x=51, chip 3 at x=97, etc.

Pedestal vs. Pipeline Cell ID

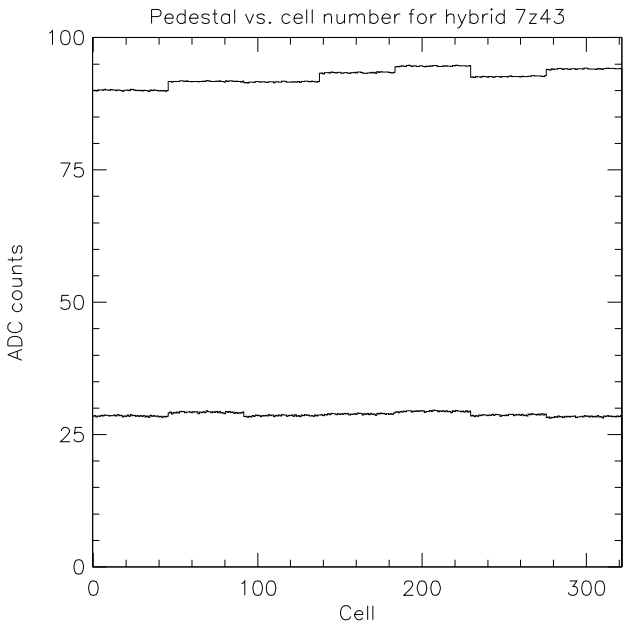

6 Noise

The following plots show the single-cell and multi-cell RMS noise:

RMS Noise

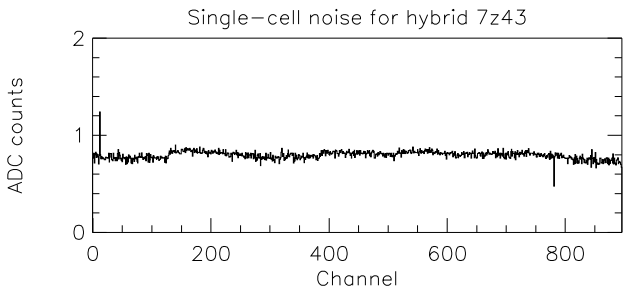

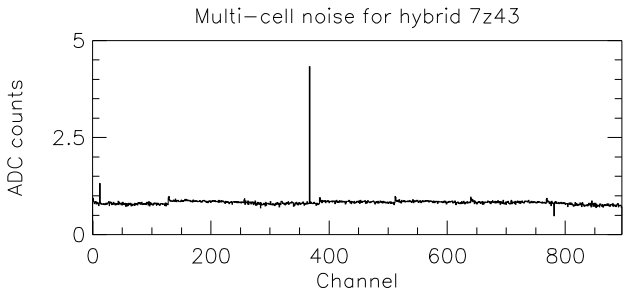

The following are histograms of the pedestal of each pipeline capacitor relative to the chip average (top); and the RMS noise of each capacitor (bottom):

Distribution of Pedestals and Noise

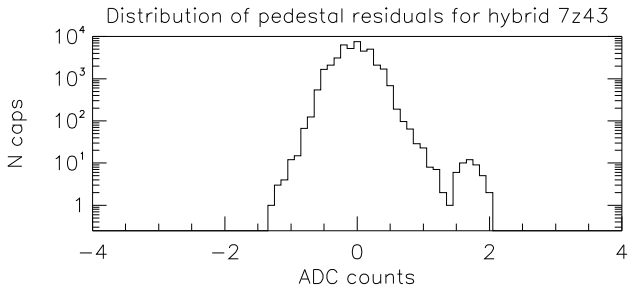

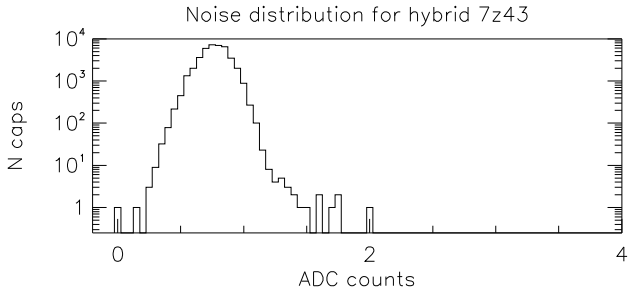

7 Currents

The following plots show the supply currents per chip as a function of measurment number. Currents are measured approximately every 10 minutes:
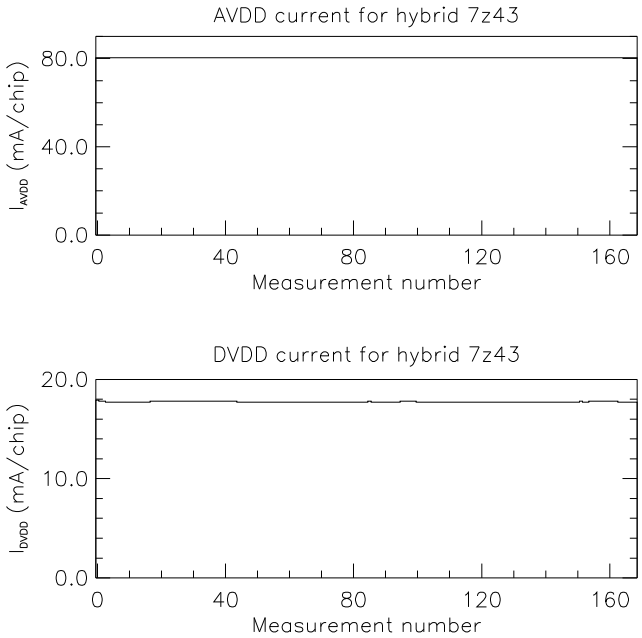
Supply Currents During Burn-in